


# Condar Fireplace Rod and Valance Kit Installation Instructions



**Step 1:** Push adjustable valance extensions all the way inside the central valance to make whole valance its minimum width (31.5 inches).

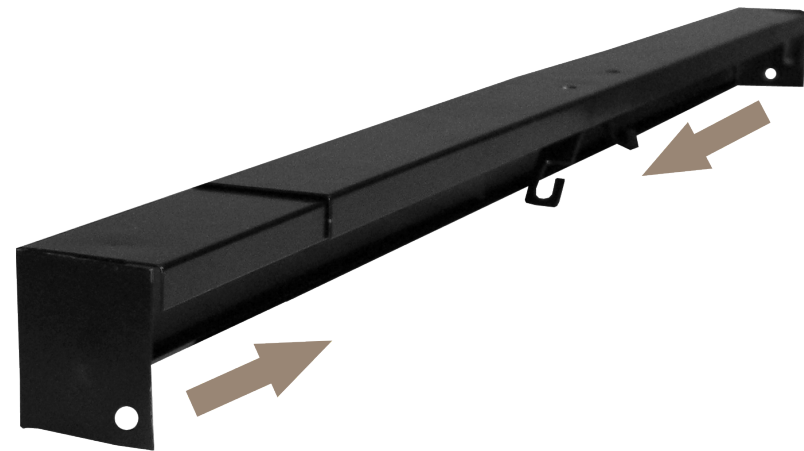

**Step 2:** Align valance in center of your firebox. Be sure front of the valance is flush with outer edge of firebox and that the two center holes face the roof of your firebox. Mark the location of the two holes with a pencil.



**Step 3:** Drill two pilot holes on the two pencil marks using a 3/16 inch masonry drill bit. If your firebox has a metal lintel, first drill a 1/4 inch hole through the metal.



**Step 4:** Place valance back in the center of your firebox and slide one valance extension outward until it meets the inner wall of firebox. Mark hole at the end of extension with a pencil. Repeat this step for the opposite side valance extension.



**Step 5:** Drill a pilot hole on the pencil marks using the same 3/16 inch masonry drill bit.




**Step 6:** Align valance back in the center of your firebox and secure the two center holes with tapcon screws.



**Step 7:** Slide both valance extensions back to meet either side of the outer wall. Then secure extensions to inner wall of your firebox with tapcon screws.

It is preferable to use a masonry drill bit for this project, but a regular drill bit will work if masonry is soft. Use anchors with your tapcon screws if needed.


## Fireplace Mesh Screen Installation Instructions:

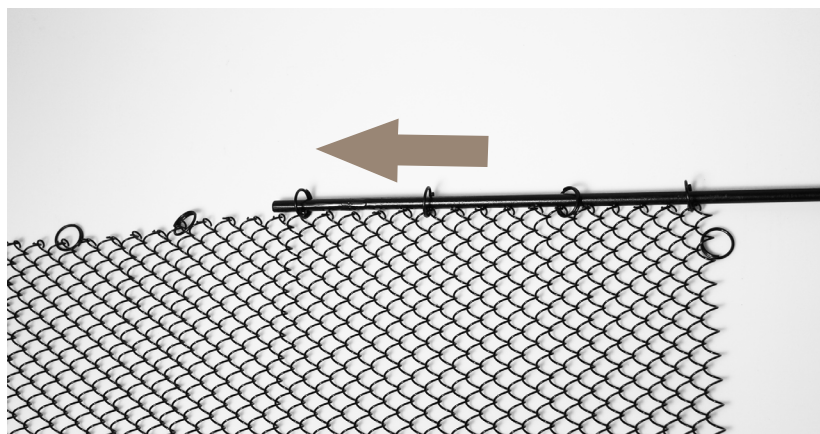

**Step 8:** Lay out screen panels on a flat surface. Using straight end of the rod and starting at end of panel opposite cool grip pull, begin threading the rod through rings. Be sure to skip the first ring (it will be attached inside the valance later).



**Step 9:** To install right side panel, be sure pull side of the screen is towards middle of the firebox. Then insert straight end of rod through the center rod holder hook farthest away from the right side (It will be a straight line from the rod hook on the end of the right side valance extension). Slide rod through the hook until there is enough room to insert the "right angle" end of the rod onto rod hook at the end of the valance extension.

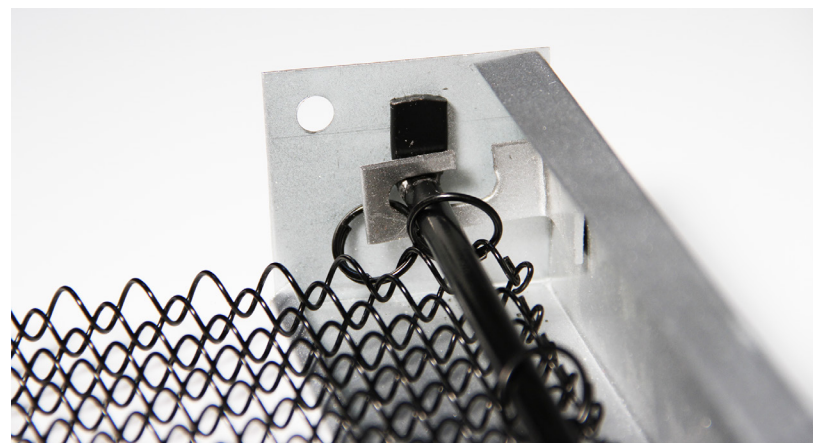

**Step 10:** Insert the "right angle" end of the rod onto rod hook by sliding it over and then down.




**Step 11:** Once rod is secure, attach the unthreaded first ring onto the rod hook on right side valance extension (This helps prevent the screen from pulling away from the walls of your firebox when in use). Repeat steps 8-11 for left side.

The perspective when installing the rod and screen will be from behind the valance, NOT straight on.

**Nice Job!**

## Rod & Valance Kits Include:

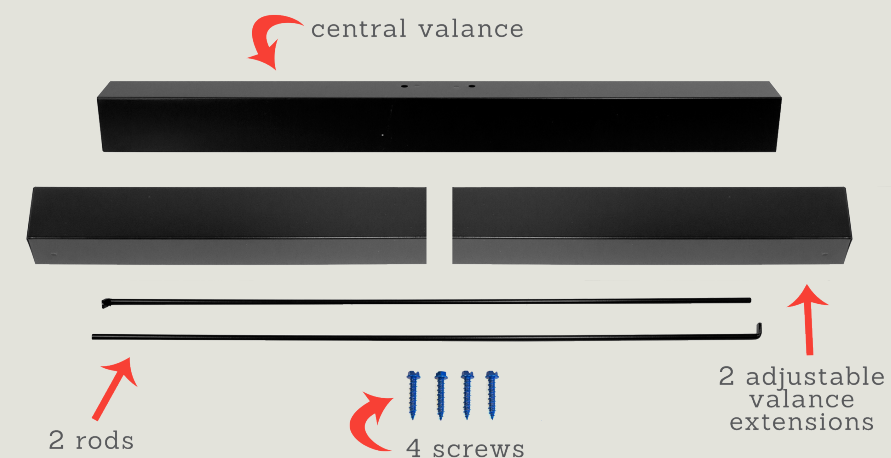

## Tools needed for installation:

- Tape Measure
- Pencil
- Drill
- 3/16 inch masonry drill bit
- 1/4 inch drill bit (required for fireboxes with metal lintel)
- Flat head screwdriver

To get your Condar Mesh Screen and other quality-made fireplace accessories, visit [condar.com](http://condar.com)



828-436-2102  
[CondarCo@Condar.com](mailto:CondarCo@Condar.com)  
 111 Kangaroo Drive  
 Columbus, North Carolina 28722